

AUTHORISED DISTRIBUTOR



A British Lubricants Company

Trust Brit-Lube Specialist Lubricants
A Family owned International Brand!



IP68

Serie s

OR1/GR2/RD3/BL6/YW12

**Fixed Time Use Feature for Better Cost Savings.
Simple Operation.**



Pulsarlube **F**

Features & Advantages

Simple Setting

Simple, one button operation

Cost Savings

Low price, cut high maintenance costs


Eco-Friendly

Eco-friendly product, where applicable parts can be disposed of separately

Others


- ▶ Assorted colors used to distinguish each dispensing period
- ▶ LED light shows that the unit is in operation
- ▶ Transparent container for easy visual inspection of remaining lubricant

Typical Industries and Applications

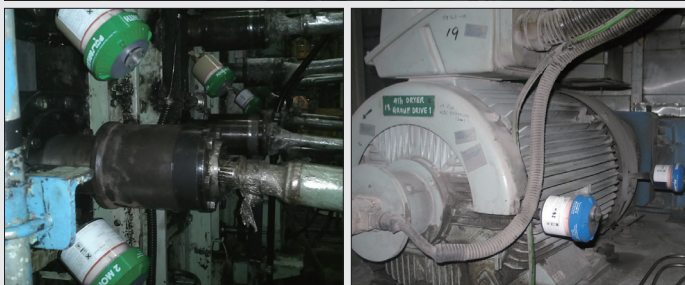

- Motors & pumps
- Paper, Steel, Cement plants where water & excessive contaminants exist
- Automotives & Electronics

Overview

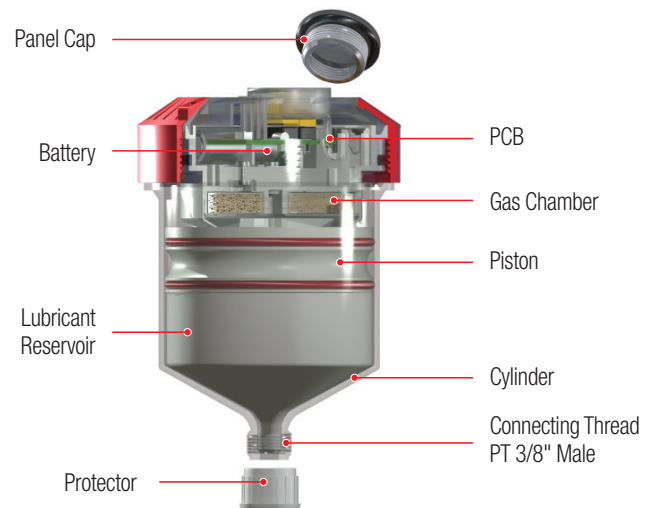

Product Specifications

Grease Pouch Capacity

250 ml (disposable)

Power Supply

Nitrogen(N₂) gas

Operating Pressure

Max. 5bar (73psi)

Operating Temperature

-20°C ~ 55°C (-4°F ~ 131°F)

Dispensing Periods

1 month (orange) / 2 month (green) /
3 month (red) / 6 month (blue) /
12 month (yellow)

Single Point Remote Installation

Max. 1m (3.3ft) with Ø8 tube

Product Certifications & IP Code

KCs / IP68



A British Lubricants Company